

SwiftReader X


Cutting Edge Video Intercom and Access

Model: SL-SRX-1

SwiftReader X is designed to provide a visually stunning and intuitive video intercom and access control experience. It brings a number of innovative new features to provide a fully customizable solution for occupant and visitor access control in condominiums, apartment buildings, office buildings, gated communities, and industrial buildings.

At a Glance

- Face recognition touchless door access
- Virtual passes and temporary visitor access
- PIN based access (Unique pin per user)
- Mobile door access
- Multi-tenant video intercom
- Package and food delivery access
- Video calls over the mobile app

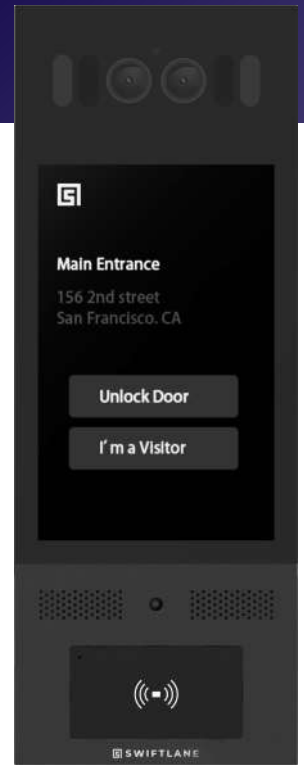

Features

Credential Types	Face Recognition Access, Mobile App Access, BLE, NFC, PIN Unlock, Key Card Access
Camera	1/2.8" Sensor, 1080p, FOV 115°(H)/ 63°V
Audio	2 Speaker, Dual Microphone Array with Echo cancellation
Display	8" IPS LCD, Touchscreen enabled

Communications

Wireless Standards	BLE, NFC
Internet	Ethernet. Cat5e or higher
Reader Frequency	125 KHz

Environmental

Operating Temperature	-22°F ~ 140°F
Operating Humidity	10 ~ 90%

Inputs, Output and Power

Power Requirements	24 VDC, 2.5A
Relays	3 Output Relays
Inputs	3 Inputs

Mechanical

Mounting Options	Flush mounted and wall mounted
Flush Mounted Dimensions	13.78 (H) x 5.12 (W) x 1.64 (D) inches
Wall Mounted Dimensions	13.78 (H) x 5.12 (W) x 2.13 (D) inches

Certifications and Warranty

Certifications	FCC Part 15
Ratings	IP65, IK10
Warranty	2-year limited warranty on electronic components

